

UNCONDITIONAL GUARANTEE OF EXCELLENCE

All the products contained in this catalogue are covered under the Unconditional Guarantee offered by Peli. This means that if for any reason you are not satisfied with the quality or performance of any product we will gladly replace it or refund your money. Peli™ will guarantee the product against breakage or defects in workmanship, with no limit of time, as long as instructions have been followed by the user. This guarantee does not cover accessories such as lamps, batteries or case contents. The o-rings must be kept greased (and should be changed if damaged) following the instructions of the product. This guarantee is not valid if there has been an abusive use of the product, exceeding logical limits. This guarantee does not cover sharkbite, bear attack or children under 5.

U.S.A. & GLOBAL HEADQUARTERS

23215 Early Avenue
Torrance, CA 90505 USA
Tel 310.32 6.4700
800.473.5422 (Outside CA)
Fax 310.326.3311

EUROPE, MIDDLE EAST & AFRICA HQ

Peli Products, S.A.
c/ Casp, 33-B Pral.
08010 • Barcelona, Spain
Tel +34 934 674 999
Fax +34 934 877 393
www.peli.com

FRANCE

Peli Products France, S.A.S.
487 rue Léopold Le Hon
01000 • Bourg en Bresse, France
Tel +33 4 74 22 80 40
Fax +33 4 74 22 09 34
www.peli.com

GERMANY

Peli Products Germany GmbH
Graf-Adolf-Platz 15
40213 • Düsseldorf, Germany
Tel +49 (0) 211 882 42 401
Fax +49 (0) 211 882 42 200
www.peli.com

CANADA

10221-184th Street
Edmonton, Alberta
T5S 2J4 Canada
Tel 78 0.481.6076
Fax 780.481.9586

JAPAN

Suntec Bldg. 7F
2-2-7 Honcho, Funabashi-shi
Chiba 273-0005 Japan
Tel +81 (0)47.433.7715
Fax +81 (0)47.433.7882

AUSTRALIA

Unit 3
65-67 Nelson Street
Stepney, South Australia 5069
Tel (0 8) 83 62-6161
Fax (08) 8362-9326

CHINA

Pine City Building
Room 1026
777 Zhaojiabang Road
Shanghai, China 200032
Tel +86.21.64189685
Fax +86.21.64189679


DISTRIBUTED BY:

**THE PELI UNCONDITIONAL
GUARANTEE OF EXCELLENCE**

©2008 Peli Products, S.A. All trademarks and logos displayed herein are registered and unregistered trademarks of Peli Products, S.A. and others.
EU CODE: 0030-000-101E APR'08

WATERTIGHT PROTECTOR™ CASES

> 2008 CASES CATALOGUE

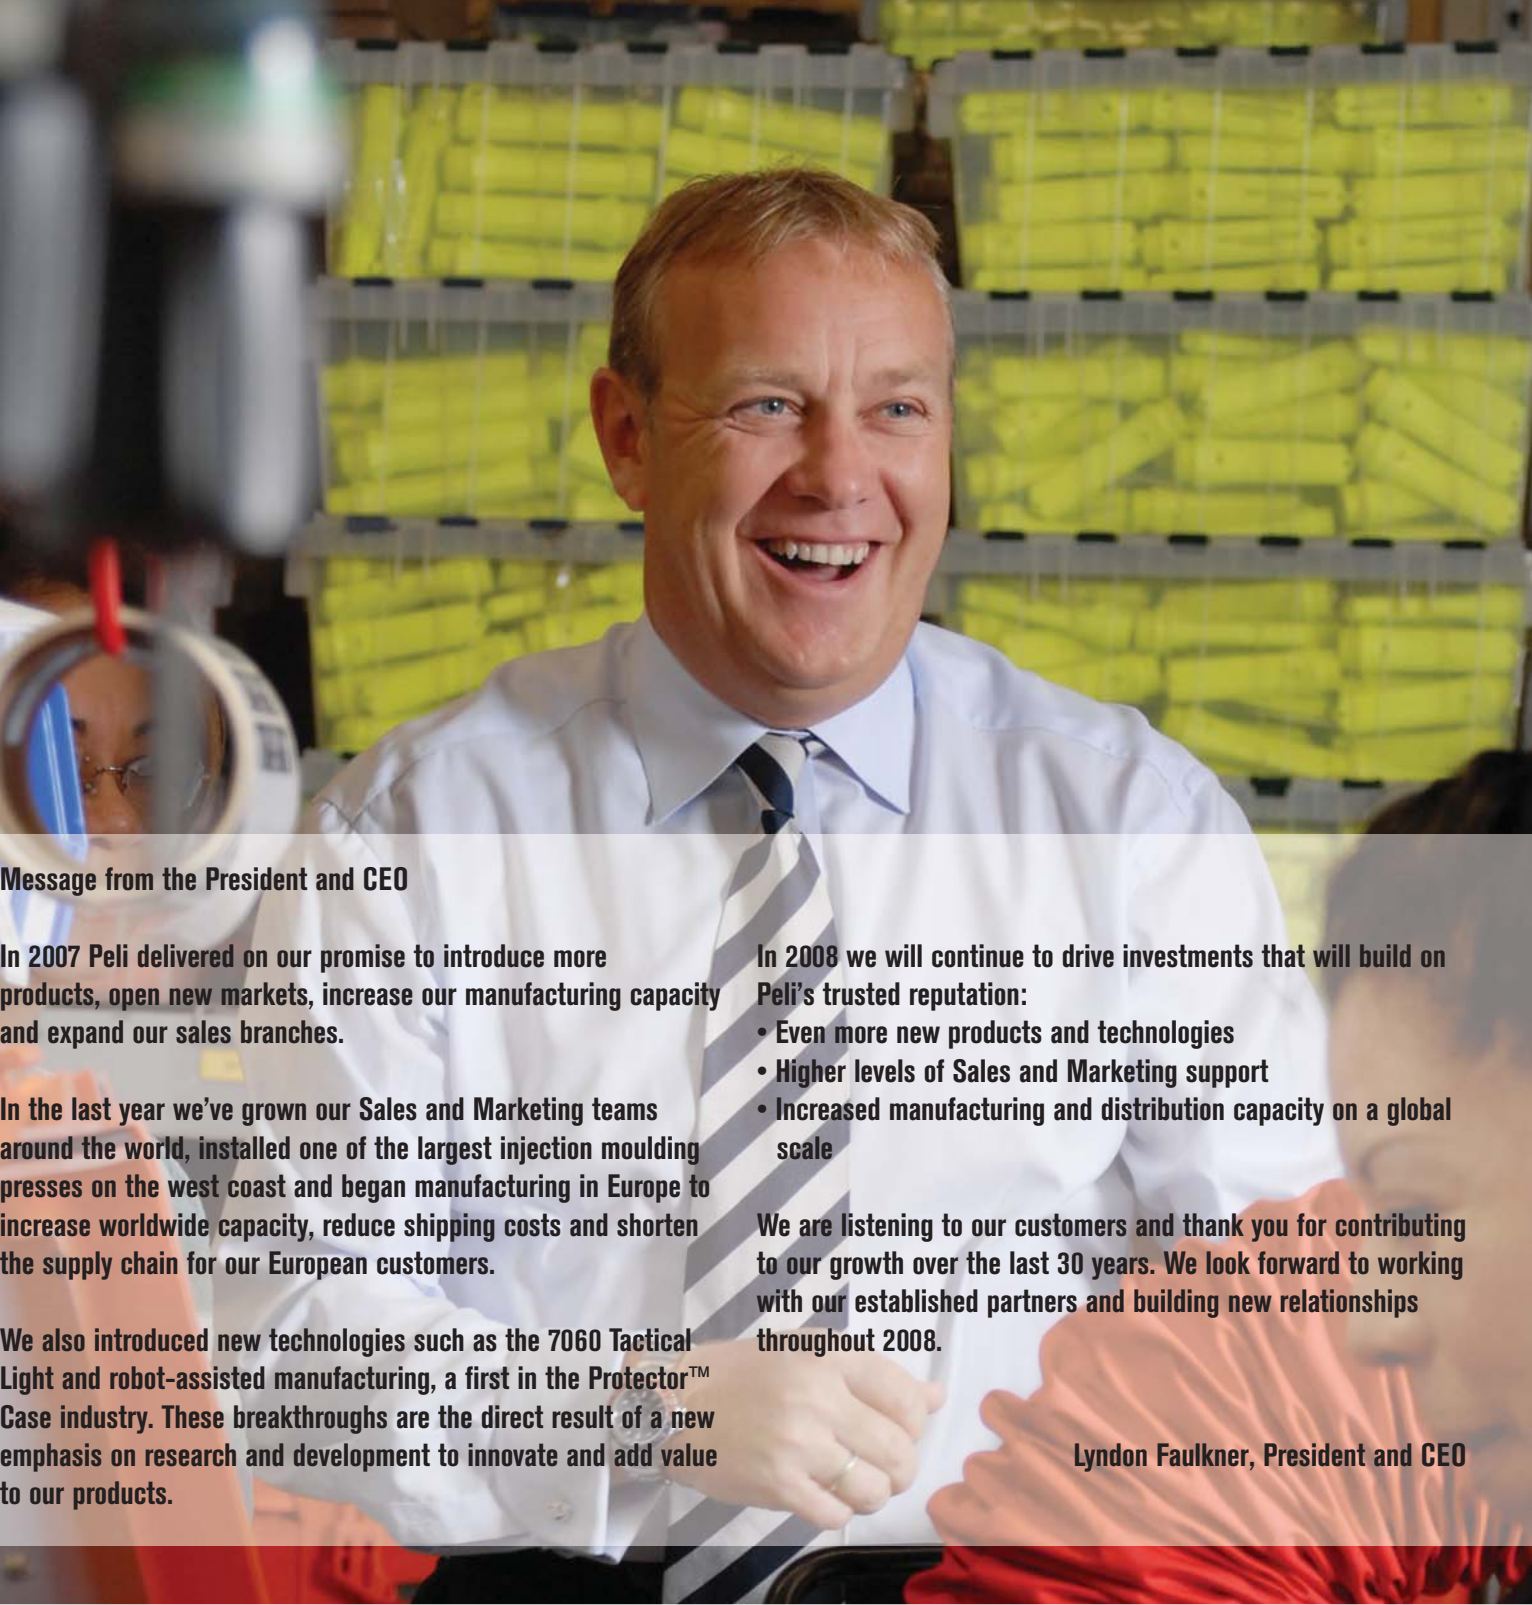

Message from the President and CEO

In 2007 Peli delivered on our promise to introduce more products, open new markets, increase our manufacturing capacity and expand our sales branches.

In the last year we've grown our Sales and Marketing teams around the world, installed one of the largest injection moulding presses on the west coast and began manufacturing in Europe to increase worldwide capacity, reduce shipping costs and shorten the supply chain for our European customers.

We also introduced new technologies such as the 7060 Tactical Light and robot-assisted manufacturing, a first in the Protector™ Case industry. These breakthroughs are the direct result of a new emphasis on research and development to innovate and add value to our products.

In 2008 we will continue to drive investments that will build on Peli's trusted reputation:

- Even more new products and technologies
- Higher levels of Sales and Marketing support
- Increased manufacturing and distribution capacity on a global scale

We are listening to our customers and thank you for contributing to our growth over the last 30 years. We look forward to working with our established partners and building new relationships throughout 2008.

Lyndon Faulkner, President and CEO



John Padian
COO



Scott Ermeti
V.P. Marketing and International
Business



Kevin Deighton
V.P. New Product Development



Mark Rolfes
V.P. U.S. Sales



Don Jordan
CFO



Nick Newman
V.P. Operations

Contents	Message from the President and CEO	2
	Who We Are	4
	Limitless Possibilities	5
Cases	Micro Cases	i1010/1010 • 1020 • 1030 • 1040 • 1050 • 1060 8-9
	Small Cases	1120 • 1150 • 1200 • 1300 • 1400 12-13
	Medium Cases	1450 • 1500 • 1510 • 1520 • 1550 • 1560 16-17
	Laptop Cases	1080 • 1090 • 1470 • 1490 • 1495 • 1430 • 1440 20-21
	Large Cases	1600 • 1610 • 1620 • 1630 • 1640 • 1650 24-25
	Large Cases	1660 • 1690 • 0340 • 0350 • 0370 26-27
	Weapon / Transport Cases	1700 • 1720 • 1730 • 1750 • 1780 30-31
	Cases Specifications	32-35
	Cases Features	36-37
	Foam Sets	38
	Padded Dividers / Lid Organisers	39
	Customised Cases	40-41
	Peli OEM	41
	Accessories	42
	Certifications	43
	Peli Employees	46
	Peli History	47
	International	48

Markets Served



Industrial




Law Enforcement



Dive



Fire

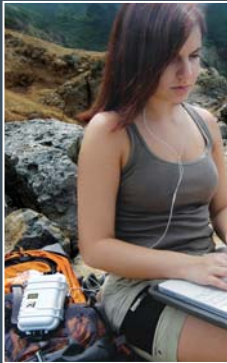

Outdoor



Military



Beliefs

- Always be vigilant about **quality**.
- Be **passionate**.
- **Respect** others and the environment.
- Be **resourceful** when managing change.
- Use **ingenuity** to improve everything we do.
- Demonstrate **integrity** by always doing the right thing.
- Be **dependable** by taking ownership of our decisions and actions.



Abilities

- Manufacturing facilities in USA and Europe.
- 24 Injection moulding presses from 60 to 1860 tons.
- ISO 9001:2000 certified.
- Handheld infrared inventory control system.
- Lean manufacturing and continual improvement processes.
- Creating the best lighting systems and Protector™ Cases in the world.

When faced with adversity there are rarely second chances. You trust your experience and training to get the job done and rely on the right gear to get it done effectively. Peli cases are engineered to perform and be **dependable** in the most extreme environments. Guaranteed. You break it, we replace it... forever.™

DEPENDABLE

i1010/1010 MICRO CASE™



Ext. Dim.	13,8 x 10,3 x 5,4 cm (5.43" x 4.06" x 2.12")
Int. Dim.	11,1 x 7,3 x 4,3 cm (4.37" x 2.87" x 1.68")
Lid/Case Depth	1,8 cm/2,4 cm (0.69"/0.94")
Weight	0,19 kg (0.41 lbs.) (with foam) 0,18 kg (0.40 lbs.) (without foam)
Colours (i1010)	■ ■ ■ ■
Colours (i1010)	■ ■ ■ ■ ■ ■
Certificates	IP67 (i1010 only)



i1010 Case designed to fit many iPod®, Nano and Shuffle models

1050 MICRO CASE™



Ext. Dim.	19,1 x 12,8 x 7,9 cm (7.50" x 5.06" x 3.12")
Int. Dim.	16 x 9,4 x 7 cm (6.31" x 3.68" x 2.75")
Lid/Case Depth	1,8 cm/4,9 cm (0.69"/1.94")
Weight	0,38 kg (0.83 lbs.) (with foam) 0,37 kg (0.81 lbs.) (without foam)
Colours	■ ■ ■ ■
Certificates	IP67

1020 MICRO CASE™



Ext. Dim.	16,2 x 12,1 x 5,4 cm (6.37" x 4.75" x 2.12")
Int. Dim.	13,5 x 9 x 4,3 cm (5.31" x 3.56" x 1.68")
Lid/Case Depth	1,8 cm/2,4 cm (0.69"/0.94")
Weight	0,26 kg (0.56 lbs.) (with foam) 0,25 kg (0.55 lbs.) (without foam)
Colours	■ ■ ■ ■
Certificates	IP67

1060 MICRO CASE™



Ext. Dim.	23,8 x 14,1 x 6,7 cm (9.37" x 5.56" x 2.62")
Int. Dim.	21 x 10,8 x 5,7 cm (8.25" x 4.25" x 2.25")
Lid/Case Depth	1,8 cm/3,7 cm (0.69"/1.44")
Weight	0,48 kg (1.03 lbs.) (with foam) 0,46 kg (1.0 lbs.) (without foam)
Colours	■ ■ ■ ■
Certificates	IP67

1030 MICRO CASE™



Ext. Dim.	19,1 x 9,8 x 6,2 cm (7.50" x 3.87" x 2.43")
Int. Dim.	16,2 x 6,7 x 5,2 cm (6.37" x 2.62" x 2.06")
Lid/Case Depth	1,8 cm/3,2 cm (0.69"/1.25")
Weight	0,28 kg (0.61 lbs.) (with foam) 0,27 kg (0.60 lbs.) (without foam)
Colours	■ ■ ■ ■
Certificates	IP67

1040 MICRO CASE™



Ext. Dim.	19,1 x 12,9 x 5,4 cm (7.50" x 5.06" x 2.12")
Int. Dim.	16,5 x 9,8 x 4,4 cm (6.50" x 3.87" x 1.75")
Lid/Case Depth	1,8 cm/2,4 cm (0.69"/0.94")
Weight	0,33 kg (0.71 lbs.) (with foam) 0,32 kg (0.70 lbs.) (without foam)
Colours	■ ■ ■ ■
Certificates	IP67

MICRO CASE FEATURES




WATER RESISTANT
The key to a watertight Micro Case is its tough polycarbonate body and the rubber liner. When closed, the lid creates a tongue-and-groove fit with the shock-absorbing rubber liner, which doubles as an o-ring. Splash it, drop it in the river, no problem. Contents are safe and dry.



BREATHE IN. BREATHE OUT.
The Automatic Pressure Purge Valve works on the molecular level. It uses a Gore-Tex® membrane that allows high pressure air molecules caused from altitude changes to escape.



TOUGH AS NAILS
The single latch is made of strong ABS plastic. It allows quick and easy access to contents and a tight seal. Also, tough stainless steel pins for hardware that are solid and long lasting.



DECISIONS, DECISIONS.
The Micro Case Series™ is available in four colours with solid lids or clear lids and latches with coloured liners for easy identification of contents. An optional Pick 'N' Pluck™ foam set is available for custom fit and extra protection for your gear.



A **resourceful** worker is a clever worker: always finding more efficient solutions. From finding better raw materials, such as light weight polymers to panel frame inserts for electronics, Peli is constantly striving to improve its products.

Panel frame mounting system offers an easy solution for installing electronic interface panels. Pre-drilled holes and stainless steel screws make fabricating a custom case a fast and accurate proposition.



RESOURCEFUL




1120 SMALL CASES

Ext. Dim.	20,6 x 16,7 x 9 cm (8.12" x 6.56" x 3.56")
Int. Dim.	18,4 x 12,1 x 7,8 cm (7.25" x 4.75" x 3.06")
Lid/Case Depth	1,3 cm/6,5 cm (0.50"/2.56")
Weight	0,57 kg (1.23 lbs.) (with foam) 0,54 kg (1.17 lbs.) (without foam)
Colours	■ ■ ■ ■
Certificates	IP67 Def Stan 81-41/STANAG 4280



1150 SMALL CASES

Ext. Dim.	23,2 x 19,2 x 11,1 cm (9.12" x 7.56" x 4.37")
Int. Dim.	20,8 x 14,4 x 9,2 cm (8.18" x 5.68" x 3.62")
Lid/Case Depth	1,9 cm/7,3 cm (0.75"/2.87")
Weight	0,92 kg (1.98 lbs.) (with foam) 0,81 kg (1.76 lbs.) (without foam)
Colours	■ ■ ■ ■
Certificates	IP67 Def Stan 81-41/STANAG 4280

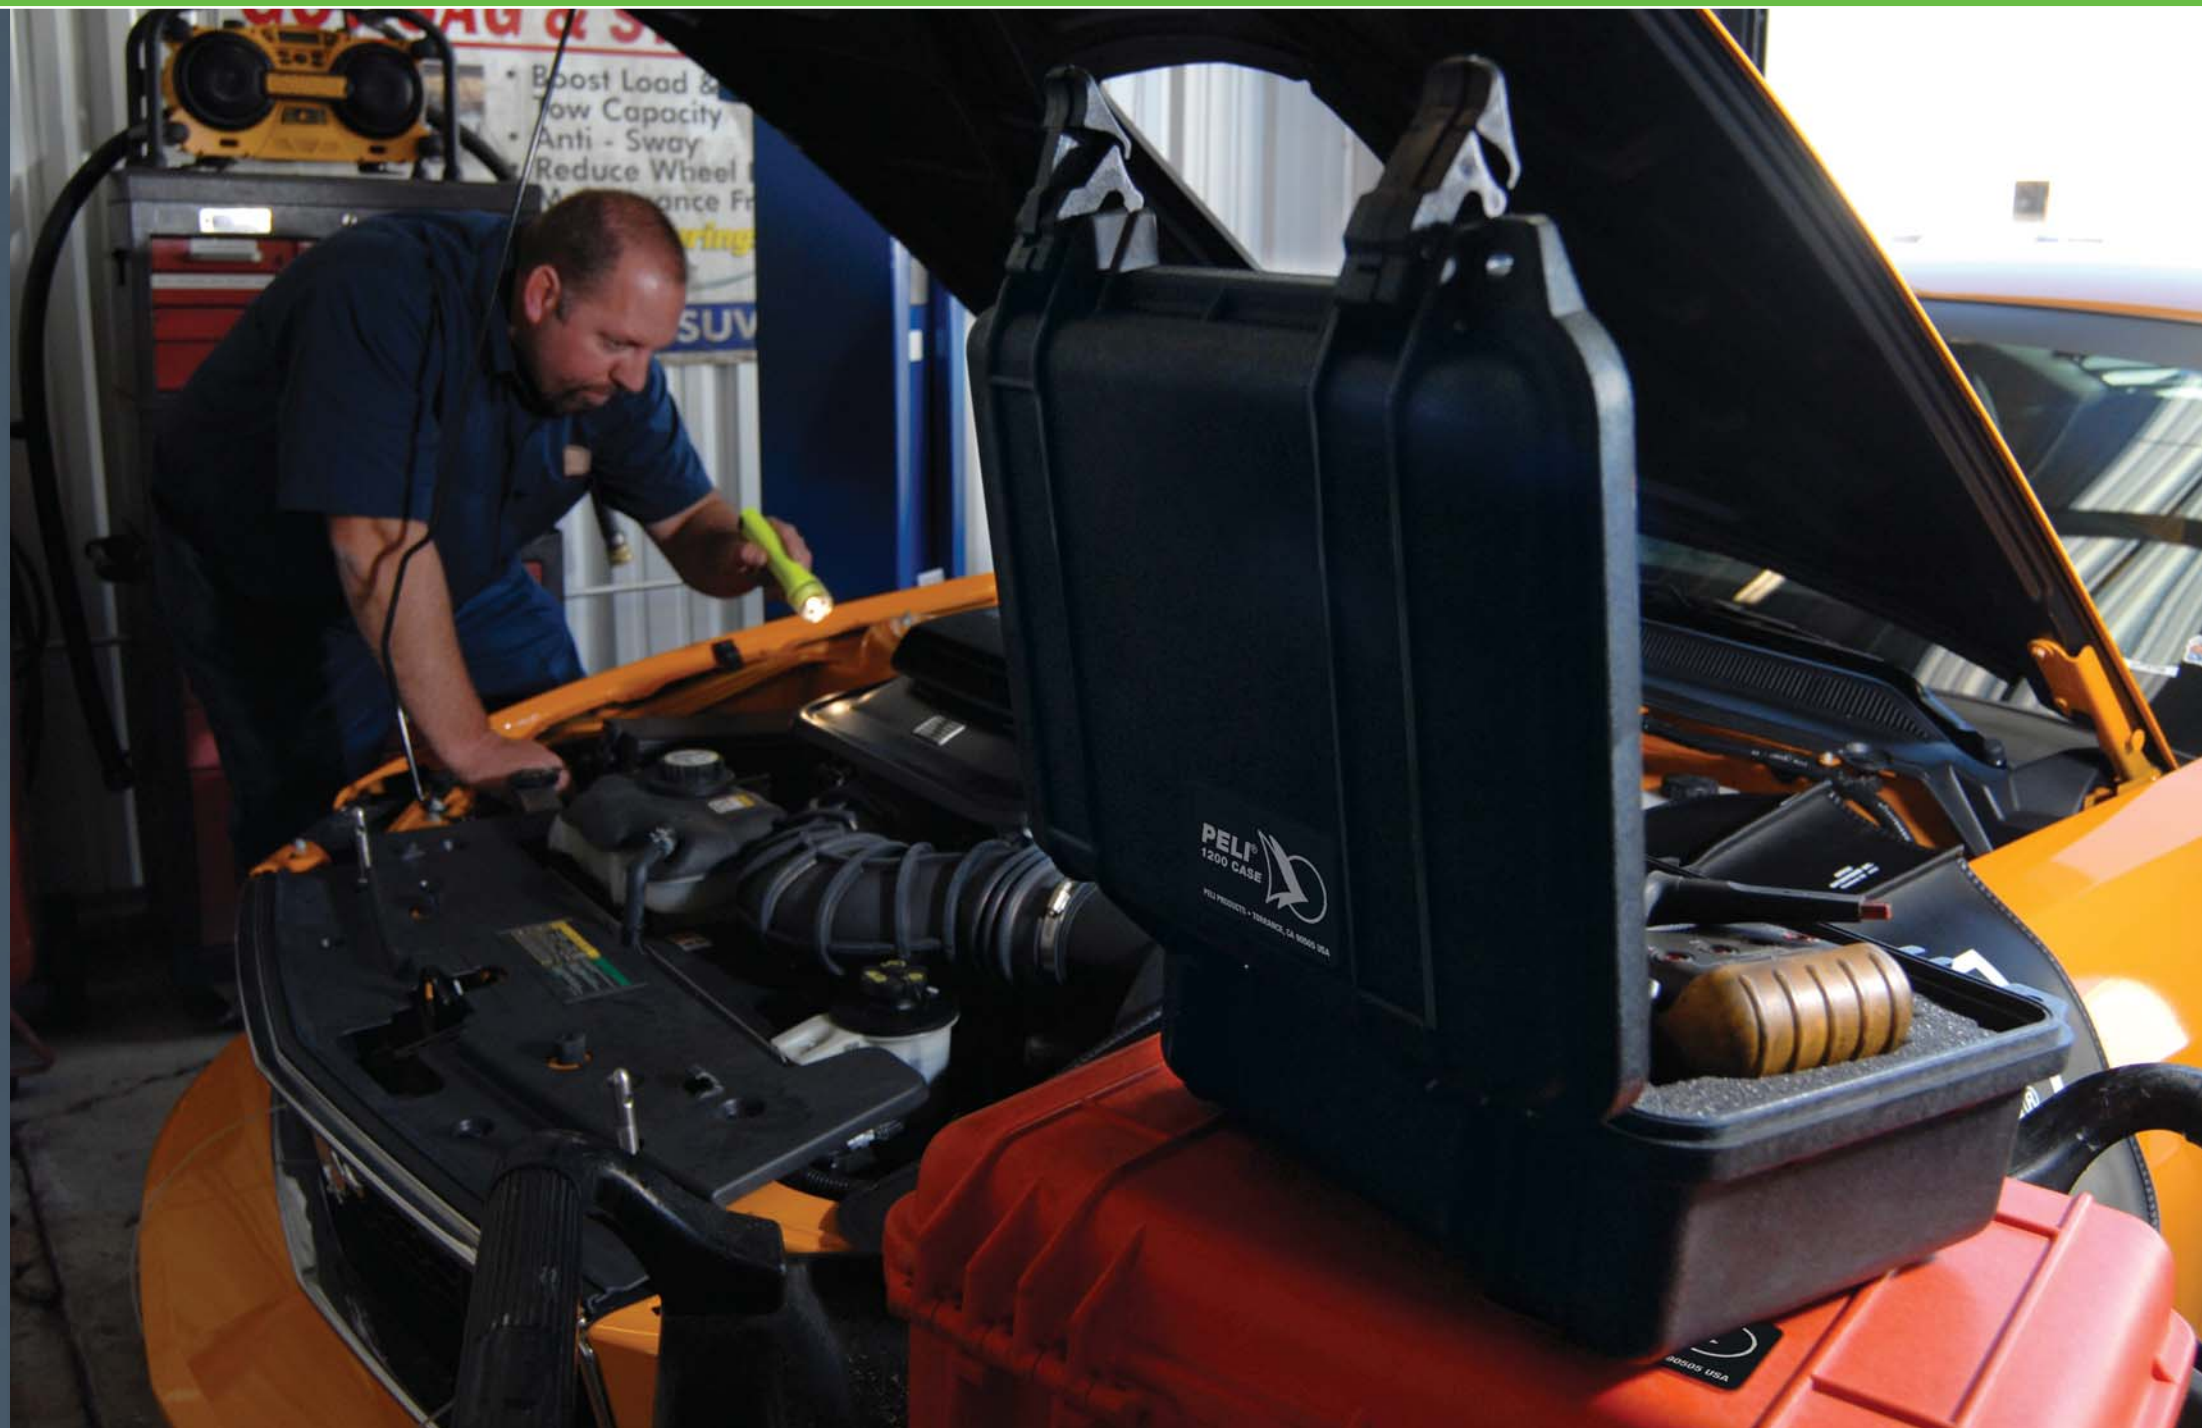

1200 SMALL CASES

Ext. Dim.	27 x 24,6 x 12,4 cm (10.62" x 9.68" x 4.87")
Int. Dim.	23,5 x 18,1 x 10,5 cm (9.25" x 7.12" x 4.12")
Lid/Case Depth	3 cm/7,4 cm (1.18"/2.93")
Weight	1,33 kg (2.87 lbs.) (with foam) 1,23 kg (2.65 lbs.) (without foam)
Colours	■ ■ ■ ■
Certificates	IP67 Def Stan 81-41/STANAG 4280



1300 SMALL CASES

Ext. Dim.	27 x 24,6 x 17,4 cm (10.62" x 9.68" x 6.87")
Int. Dim.	25,1 x 17,8 x 15,6 cm (9.87" x 7.00" x 6.12")
Lid/Case Depth	3 cm/12,5 cm (1.18"/4.93")
Weight	1,63 kg (3.53 lbs.) (with foam) 1,43 kg (3.09 lbs.) (without foam)
Colours	■ ■ ■ ■
Certificates	IP67 Def Stan 81-41/STANAG 4280



1400 SMALL CASES

Ext. Dim.	34 x 29,5 x 15,2 cm (13.37" x 11.62" x 6.00")
Int. Dim.	30 x 22,5 x 13,2 cm (11.81" x 8.87" x 5.18")
Lid/Case Depth	3 cm/10,2 cm (1.18"/4.0")
Weight	2,04 kg (4.41 lbs.) (with foam) 1,84 kg (3.97 lbs.) (without foam)
Colours	■ ■ ■ ■
Certificates	IP67 Def Stan 81-41/STANAG 4280 ATA 300 MIL C-4150J




PASSIONATE



We are **passionate** about our products. Continual refinements are made through engineering and punishing tests are conducted for submersion and temperature extremes. The result is the toughest Protector™ Cases on the planet.



Automatic Pressure
Equalization Valve

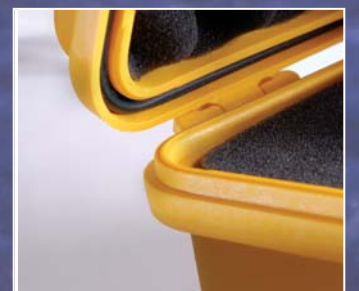

Polymer o-ring with
tongue and groove fit



1450 MEDIUM CASE

Ext. Dim.	40,7 x 33 x 17,5 cm (16.00" x 13.00" x 6.87")
Int. Dim.	37,1 x 25,9 x 15,2 cm (14.62" x 10.18" x 6.00")
Lid/Case Depth	4,4 cm/10,8 cm (1.75"/4.25")
Weight	2,96 kg (6.39 lbs.) (with foam) 2,55 kg (5.51 lbs.) (without foam)
Colours	■ ■ ■ ■ ■
Certificates	IP67 • MIL C-4150J Def Stan 81-41/STANAG 4280



1520 MEDIUM CASE

Ext. Dim.	48,6 x 39,2 x 19,2 cm (19.78" x 15.77" x 7.41")
Int. Dim.	45,4 x 32,4 x 17,2 cm (18.06" x 12.89" x 6.72")
Lid/Case Depth	4,6 cm/12,5 cm (1.79"/4.93")
Weight	4,33 kg (9.35 lbs.) (with foam) 3,76 kg (8.29 lbs.) (without foam)
Colours	■ ■ ■ ■ ■
Certificates	IP67 • MIL C-4150J Def Stan 81-41/STANAG 4280



EMS CASES

1500EMS
1550EMS
1600EMS

- Custom configured lid organiser and trays for EMS professionals



1500 MEDIUM CASE

Ext. Dim.	47 x 35,7 x 17,6 cm (18.50" x 14.06" x 6.93")
Int. Dim.	42,6 x 28,4 x 15,6 cm (16.75" x 11.18" x 6.12")
Lid/Case Depth	4,6 cm/10,9 cm (1.81"/4.31")
Weight	3,26 kg (7.05 lbs.) (with foam) 2,96 kg (6.39 lbs.) (without foam)
Colours	■ ■ ■ ■ ■
Certificates	IP67 • MIL C-4150J Def Stan 81-41/STANAG 4280 ATA 300

Configurations:

- 1500EMS**
- Custom configured lid organiser and trays for EMS professionals



1550 MEDIUM CASE

Ext. Dim.	52,4 x 42,9 x 20,6 cm (20.62" x 16.87" x 8.12")
Int. Dim.	46,8 x 35,6 x 19,4 cm (18.43" x 14.00" x 7.62")
Lid/Case Depth	4,4 cm/14,9 cm (1.75"/5.87")
Weight	5,51 kg (11.9 lbs.) (with foam) 4,9 kg (10.58 lbs.) (without foam)
Colours	■ ■ ■ ■ ■
Certificates	IP67 • MIL C-4150J Def Stan 81-41/STANAG 4280 ATA 300

Configurations:

- 1550EMS**
- Custom configured lid organiser and trays for EMS professionals



1510LOC MEDIUM CASE

Ext. Dim.	55,9 x 35,1 x 22,9 cm (22.00" x 13.81" x 9.00")
Int. Dim.	50,2 x 27,9 x 19,4 cm (19.75" x 11.00" x 7.60")
Lid/Case Depth	4,5 cm/14,7cm (1.79"/5.79")
Weight	6,17kg (13.6 lbs.) (with foam) 5,44kg (11.99 lbs.) (without foam)
Colours	■ ■
Certificates	IP67 Def Stan 81-41/STANAG 4280

Configurations:

- 1510LOC (Laptop Overnight Case)**
- Case with padded fully enclosed apparel insert, lid organiser with padded laptop holder, and accessory pouch
- 1510NF**
- Case with no foam
- 1510**
- Case with foam set
- 1514**
- Case with padded dividers




1560 MEDIUM CASE

Ext. Dim.	56,1 x 45,6 x 26,5 cm (22.06" x 17.93" x 10.43")
Int. Dim.	51,8 x 39,2 x 22,9 cm (20.37" x 15.43" x 9.00")
Lid/Case Depth	5,1 cm/17,8 cm (2.00"/7.00")
Weight	9,26 kg (20 lbs.) (with foam) 7,87 kg (17 lbs.) (without foam)
Colours	■ ■
Certificates	IP67 Def Stan 81-41/STANAG 4280



* Coming Soon

Our vigilance for the safety of our users means we don't cut corners when designing our cases. You will find the highest **quality** materials and construction possible in our cases. We know this because we put all our cases through rigorous independent laboratory testing procedures, including drop tests, vibration tests, and leak tests.

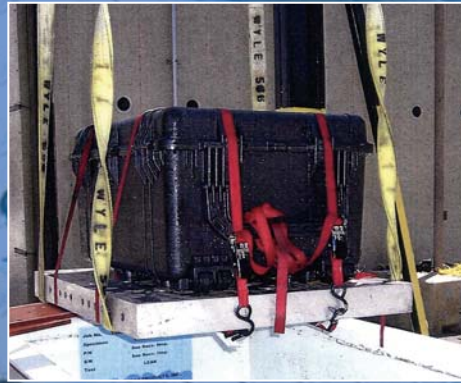

Leak and impact testing in accordance with MIL-C-4150J.

KEEP BACK 500 FT

QUALITY





1080 LAPTOP CASE

Ext. Dim.

Int. Dim.

Lid/Case Depth

Weight

Colours

Certificates

34,9 x 27,8 x 6,5 cm
(13.75" x 10.95" x 2.55")

32,5 x 24,9 x 4,3 cm
(12.80" x 9.80" x 1.70")

2,2 cm/2,2 cm (0.85"/0.85")

1,34 kg (2.89 lbs.) (with foam)
1,28 kg (2.76 lbs.) (without foam)

☐

IP66

Configurations:

- 1080CC
- Case with computer case liner



1090 LAPTOP CASE

Ext. Dim.

Int. Dim.

Lid/Case Depth

Weight

Colours

Certificates

40,2 x 33,3 x 7,3 cm
(15.83" x 13.10" x 2.86")

38,1 x 28,7 x 4,9 cm
(15.00" x 11.32" x 1.92")

2,4 cm/2,4 cm (0.96"/0.96")

1,50 kg (3.32 lbs.) (with foam)
1,35 kg (2.98 lbs.) (without foam)

☐

IP66



1470 LAPTOP CASE

Ext. Dim.

Int. Dim.

Lid/Case Depth

Weight

Colours

Certificates

42,4 x 33,2 x 11,1 cm
(16.68" x 13.06" x 4.37")

39,7 x 26,5 x 9,5 cm
(15.62" x 10.43" x 3.75")

3,5 cm/6 cm (1.37"/2.37")

2,55 kg (5.51 lbs.) (with foam)
1,98 kg (4.28 lbs.) (without foam)

☐

IP57
MIL C-4150J



Double safety locking latches with keys



1430 LAPTOP CASE

Ext. Dim.

Int. Dim.

Lid/Case Depth

Weight

Colours

Certificates

43 x 24,4 x 34,1 cm
(16.93" x 9.61" x 13.42")

34,5 x 14,6 x 29,7 cm
(13.56" x 5.76" x 11.70")

5,1 cm/24,6 cm (2.0"/9.70")

3,01 kg (6.5 lbs.) (with foam)
2,59 kg (5.6 lbs.) (without foam)

☐

IP67
Def Stan 81-41/STANAG 4280

Configurations:

- 1434

• Case with padded dividers and lid organiser
- 1437

• Case with padded office divider set and lid organiser



1440 LAPTOP CASE

Ext. Dim.

Int. Dim.

Lid/Case Depth

Weight

Colours

Certificates

50,1 x 30,5 x 45,7 cm
(19.70" x 12.00" x 18.00")

43,5 x 19,1 x 40,7 cm
(17.10" x 7.50" x 16.00")

5,1 cm/35,5 cm (2.0"/14.0")

7,64 kg (16.5 lbs.) (with foam)
6,71 kg (14.5 lbs.) (without foam)

☐

IP67
Def Stan 81-41/STANAG 4280

Configurations:

- 1444

• Case with utility padded divider set and lid organiser
- 1447

• Case with hanging file set, laptop slot and lid organiser



1495 LAPTOP CASE

Ext. Dim.

Int. Dim.

Lid/Case Depth

Weight

Colours

Certificates

54,9 x 43,8 x 12,4 cm
(21.62" x 17.25" x 4.87")

47,9 x 33,3 x 9,7 cm
(18.87" x 13.12" x 3.81")

2,8 cm/6,8 cm (1.12"/2.68")

3,88 kg (8.37 lbs.) (with foam)
3,35 kg (7.23 lbs.) (without foam)

☐

IP67
Def Stan 81-41/STANAG 4280

Configurations:

- 1495CC1
- 1495CC2



3 dial combination lock



1490 LAPTOP CASE

Ext. Dim.

Int. Dim.

Lid/Case Depth

Weight

Colours

Certificates

50,5 x 35,4 x 11,9 cm
(19.87" x 13.93" x 4.68")

45,1 x 28,9 x 10,5 cm
(17.75" x 11.37" x 4.12")

3,8 cm/6,7 cm (1.50"/2.62")

3,01 kg (6.5 lbs.) (with foam)
2,53 kg (5.47 lbs.) (without foam)

☐

IP57
Def Stan 81-41/STANAG 4280



Configurations:

- 1490CC1

• Lid organiser, shock absorbing tray, and removable shoulder strap
- 1490CC2

• Pick 'N' Pluck™ Foam w/Lid organiser and removable shoulder strap



Transporting your gear from point A to point B intact is not always a straightforward proposition. Sometimes it takes some **ingenuity** to accomplish the task. Engineers at Peli use this same approach in designing our cases. Features like graduated deflection ribs and easy open double step latches are just two examples. All of this ingenuity allows you to concentrate on doing your job with one less worry.



Graduated deflection ribs direct impact forces away from the case without shattering the ribs

Photo © 2007 N. Jagoda used with permission

INGENUITY



1600 LARGE CASE

Ext. Dim.	61,6 x 49,4 x 22,1 cm (24.25" x 19.43" x 8.68")
Int. Dim.	54,4 x 41,9 x 20 cm (21.43" x 16.50" x 7.87")
Lid/Case Depth	4,4 cm/15,6 cm (1.75"/6.12")
Weight	6,53 kg (14.11 lbs.) (with foam) 6,02 kg (13.0 lbs.) (without foam)
Colours	☐ ☐ ☐ ☐
Certificates	IP67 • MIL C-4150J Def Stan 81-41/STANAG 4280 ATA 300



Configurations:

1600EMS

- Custom configured lid organiser and trays for EMS professionals
- Also available for 1500 / 1550



1640 LARGE CASE

Ext. Dim.	69,1 x 69,9 x 41,4 cm (27.20" x 27.50" x 16.30")
Int. Dim.	60,2 x 61 x 35,3 cm (23.70" x 24.00" x 13.90")
Lid/Case Depth	5,1 cm/30,2 cm (2.0"/11.90")
Weight	17,59 kg (38.0 lbs.) (with foam) 15,74 kg (34.0 lbs.) (without foam)
Colours	☐
Certificates	IP67 Def Stan 81-41/STANAG 4280

1610 LARGE CASE



Ext. Dim.	62,8 x 49,8 x 30,3 cm (24.71" x 19.58" x 11.93")
Int. Dim.	55,1 x 42,2 x 26,8 cm (21.68" x 16.62" x 10.56")
Lid/Case Depth	5,2 cm/21,6 cm (2.06"/8.50")
Weight	10,41 kg (22.49 lbs.) (with foam) 9,26 kg (20.0 lbs.) (without foam)
Colours	☐
Certificates	IP67 Def Stan 81-41/STANAG 4280



1650 LARGE CASE

Ext. Dim.	78,1 x 52,1 x 29,5 cm (30.75" x 20.50" x 11.62")
Int. Dim.	72,4 x 44,1 x 26,7 cm (28.50" x 17.37" x 10.50")
Lid/Case Depth	4,7 cm/21,9 cm (1.87"/8.62")
Weight	16,43 kg (35.49 lbs.) (with foam) 13,47 kg (29.10 lbs.) (without foam)
Colours	☐
Certificates	IP67 Def Stan 81-41/STANAG 4280 MIL C-4150J, ATA 300

* Shown with third party custom foam solution



1620 LARGE CASE

Ext. Dim.	63 x 49,2 x 35,2 cm (24.81" x 19.37" x 13.87")
Int. Dim.	54,3 x 41,4 x 31,9 cm (21.37" x 16.31" x 12.56")
Lid/Case Depth	5,2 cm/26,7 cm (2.06"/10.50")
Weight	12,04 kg (26.01 lbs.) (with foam) 11,33 kg (24.47 lbs.) (without foam)
Colours	☐
Certificates	IP67 Def Stan 81-41/STANAG 4280



1630 LARGE CASE

Ext. Dim.	79,5 x 61,5 x 44,4 cm (31.28" x 24.21" x 17.48")
Int. Dim.	70,4 x 53,3 x 39,4 cm (27.70" x 20.98" x 15.50")
Lid/Case Depth	8,3 cm/30,8 cm (3.25"/12.14")
Weight	16,67 kg (36.0 lbs.) (with foam) 14,35 kg (31.0 lbs.) (without foam)
Colours	☐
Certificates	IP67 Def Stan 81-41/STANAG 4280





1660 LARGE CASE

Ext. Dim.	80 x 58,1 x 48,3 cm (31.50" x 22.87" x 19.00")
Int. Dim.	71,6 x 50,2 x 44,8 cm (28.18" x 19.75" x 17.62")
Lid/Case Depth	8,9 cm/35,9 cm (3.50"/14.12")
Weight	19,5 kg (42.11 lbs.) (with foam) 15,82 kg (34.17 lbs.) (without foam)
Colours	□
Certificates	IP67 Def Stan 81-41/STANAG 4280



1690 LARGE CASE

Ext. Dim.	84,8 x 72,3 x 46,3 cm (33.36" x 28.44" x 18.23")
Int. Dim.	76,3 x 63,6 x 40,7 cm (30.01" x 25.02" x 16.01")
Lid/Case Depth	7,3 cm/30,8 cm (2.86"/12.14")
Weight	19,91 kg (43.0 lbs.) (with foam) 15,74 kg (34.0 lbs.) (without foam)
Colours	□
Certificates	IP67 Def Stan 81-41/STANAG 4280



0340 LARGE CASE

Ext. Dim.	52,1 x 52,1 x 48,9 cm (20.50" x 20.50" x 19.25")
Int. Dim.	45,7 x 45,7 x 45,7 cm (18.00" x 18.00" x 18.00")
Lid/Case Depth	10,2 cm/31,8 cm (4.0"/12.50")
Weight	13,78 kg (29.76 lbs.) (with foam) 11,11 kg (24.0 lbs.) (without foam)
Colours	□
Certificates	IP67 Def Stan 81-41/STANAG 4280


Wheels and Trolley Handle standard



0350 LARGE CASE

Ext. Dim.	57,2 x 57 x 54 cm (22.50" x 22.43" x 21.25")
Int. Dim.	50,8 x 50,8 x 50,8 cm (20.00" x 20.00" x 20.00")
Lid/Case Depth	12,7 cm/38,1 cm (5.0"/15.0")
Weight	14,82 kg (32.01 lbs.) (with foam) 12,03 kg (25.99 lbs.) (without foam)
Colours	□
Certificates	IP67 Def Stan 81-41/STANAG 4280

Optional mobility kit available

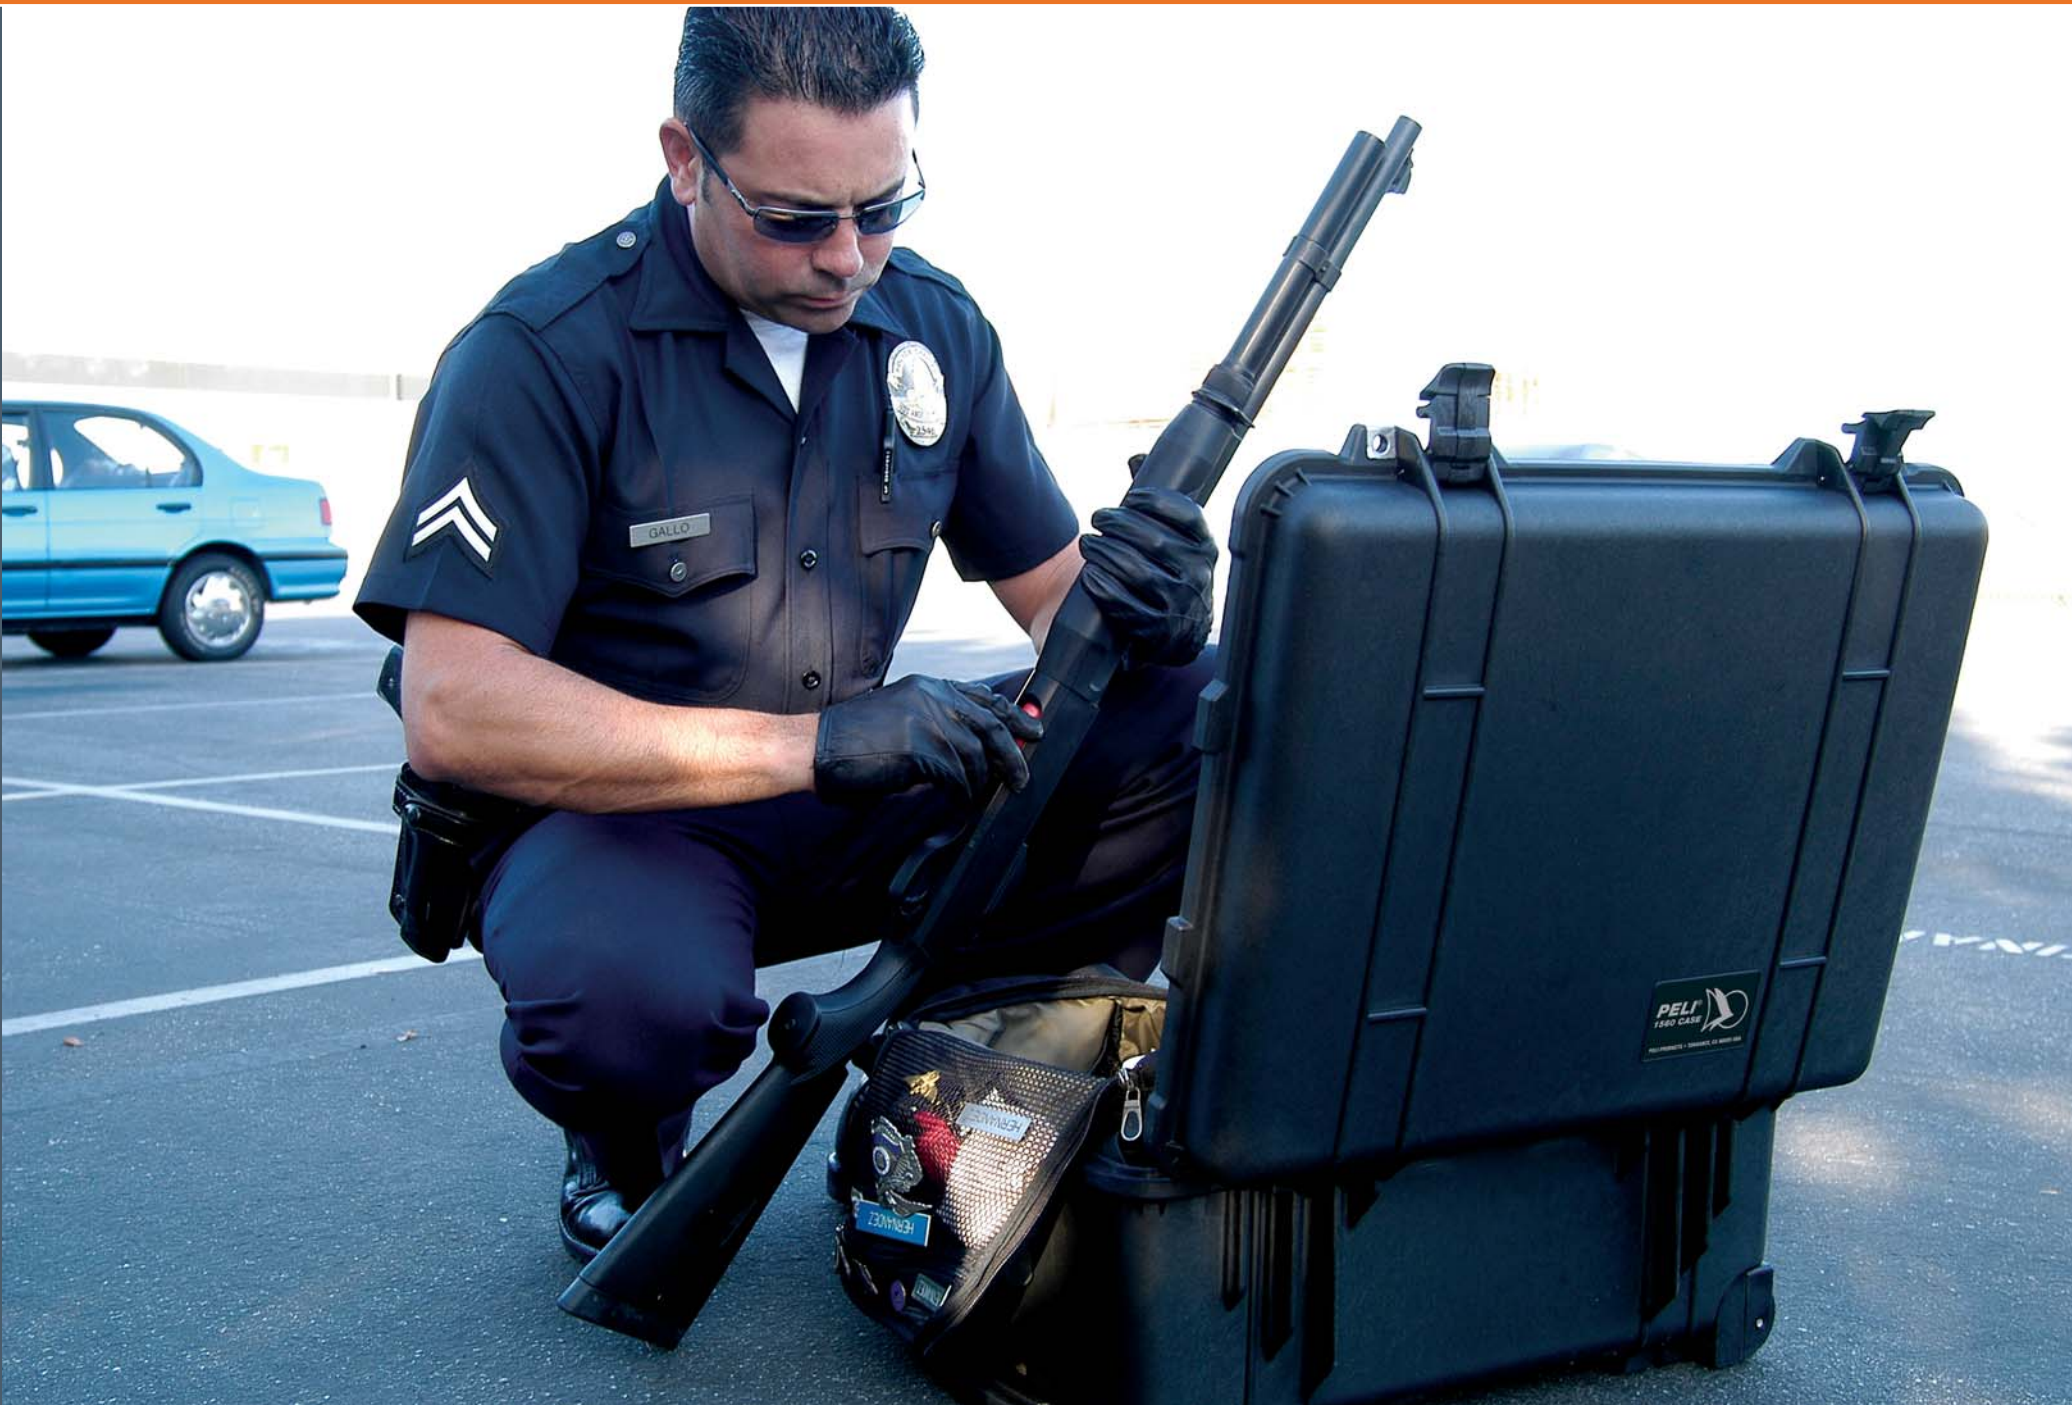

- Cat. No. 0357: Mobility Kit**
- Optional for 0350 and 0370 Cases
 - Four removable casters with mounting plates
 - Pull strap and nylon carry bag included



0370 LARGE CASE

Ext. Dim.	67,3 x 67,3 x 64,2 cm (26.50" x 26.50" x 25.25")
Int. Dim.	61 x 61 x 61 cm (24.00" x 24.00" x 24.00")
Lid/Case Depth	11,4 cm/45,7 cm (4.5"/18.0")
Weight	18,98 kg (41.0 lbs.) (with foam) 14,8 kg (31.97 lbs.) (without foam)
Colours	□
Certificates	IP67 Def Stan 81-41/STANAG 4280

Optional mobility kit available



- Cat. No. 0357: Mobility Kit**
- Optional for 0350 and 0370 Cases
 - Four removable casters with mounting plates
 - Pull strap and nylon carry bag included

Integrity of character, integrity of material: Peli has it. Our cases are used in the most extreme conditions, from burning buildings to arctic treks. You can depend on our cases to perform at the highest level and our guarantee and customer service show it day in and day out.



Advanced polymers keep weight down without sacrificing strength.



1700 WEAPON CASE



Ext. Dim.	96,9 x 40,6 x 15,5 cm (38.12" x 16.00" x 6.12")
Int. Dim.	90,8 x 34,3 x 13,3 cm (35.75" x 13.50" x 5.25")
Lid/Case Depth	4,4 cm/8,9 cm (1.75"/3.50")
Weight	7,86 kg (16.98 lbs.) (with foam) 7,45 kg (16.09 lbs.) (without foam)
Colours	■ ■ *
Certificates	IP67 Def Stan 81-41/STANAG 4280 MIL C-4150J

1720 WEAPON CASE



Ext. Dim.	112,7 x 40,6 x 15,5 cm (44.37" x 16.00" x 6.12")
Int. Dim.	106,7 x 34,3 x 13,3 cm (42.00" x 13.50" x 5.25")
Lid/Case Depth	4,4 cm/8,9 cm (1.75"/3.50")
Weight	8,84 kg (18.96 lbs.) (with foam) 7,92 kg (16.76 lbs.) (without foam)
Colours	■ ■ *
Certificates	Def Stan 81-41/STANAG 4280

1730 TRANSPORT CASE



Ext. Dim.	95,2 x 68,9 x 36,5 cm (37.50" x 27.13" x 14.37") (44.37" x 16.00" x 6.12")
Int. Dim.	86,3 x 60,9 x 31,7 cm (34.00" x 24.00" x 12.50")
Lid/Case Depth	6,3 cm /25,4 cm (2.50"/10.00")
Weight	16,78 kg (37 lbs.) (with foam) 13,15 kg (29 lbs.) (without foam)
Colours	■ ■ ■ *
Certificates	Pending

* OD Green available upon request ** Coming soon



U.S. Navy photo used with permission, without endorsement expressed or implied.

1750 WEAPON CASE



Ext. Dim.	134,7 x 40,7 x 15,6 cm (53.00" x 16.00" x 6.12")
Int. Dim.	128,3 x 34,3 x 13,3 cm (50.50" x 13.50" x 5.25")
Lid/Case Depth	4,4 cm/8,9 cm (1.75"/3.50")
Weight	11,84 kg (25.57 lbs.) (with foam) 10,92 kg (23.59 lbs.) (without foam)
Colours	■ ■ *
Certificates	IP67 Def Stan 81-41/STANAG 4280



1780RF WEAPON CASE



Ext. Dim.	114,1 x 64,3 x 41,9 cm (44.90" x 25.32" x 16.50")
Int. Dim.	106,7 x 55,9 x 38,4 cm (42.00" x 22.00" x 15.10")
Lid/Case Depth	19,3 cm/18,5 cm (7.58"/7.30")
Weight	22,69 kg (49.0 lbs.) (with foam) 17,78 kg (38.4 lbs.) (without foam)
Colours	■
Certificates	Def Stan 81-41/STANAG 4280

Configurations:



1780T: Transport Case
1780HL: Hard liner insert



* OD Green available upon request

Trolley Handle
and built-in
wheels
for easy
transport



Case	Exterior	Interior	Lid Depth	Case Depth	Special Features	Weight with Foam	Weight without Foam	Colours	Buoyancy Maximum	Range Temperature Minimum/Maximum	OPTIONAL ACCESSORIES						Certificates	Case
											Foam Set	Padded Dividers	Panel Frame	Lid Organizers	Nameplate	Other		
1010	13,8 x 10,3 x 5,4 cm (5.43" x 4.06" x 2.12")	11,1 x 7,3 x 4,3 cm (4.37" x 2.87" x 1.68")	1,8 cm (0.69")	2,4 cm (0.94")	-	0,19 kg (0.41 lbs.)	0,18 kg (0.4 lbs.)		0,23 kg (0.51 lbs.)	-23 / 93° C (-10 / 199.4° F)	1012	-	-	-	-	-	· IP67	1010
i1010	13,8 x 10,3 x 5,4 cm (5.43" x 4.06" x 2.12")	11,1 x 7,3 x 4,3 cm (4.37" x 2.87" x 1.68")	1,8 cm (0.69")	2,4 cm (0.94")	-	0,19 kg (0.41 lbs.)	0,18 kg (0.4 lbs.)		0,23 kg (0.51 lbs.)	-23 / 93° C (-10 / 199.4° F)								i1010
1020	16,2 x 12,1 x 5,4 cm (6.37" x 4.75" x 2.12")	13,5 x 9 x 4,3 cm (5.31" x 3.56" x 1.68")	1,8 cm (0.69")	2,4 cm (0.94")	-	0,26 kg (0.56 lbs.)	0,25 kg (0.55 lbs.)		0,34 kg (0.75 lbs.)	-23 / 93° C (-10 / 199.4° F)	1022	-	-	-	-	-	· IP67	1020
1030	19,1 x 9,8 x 6,2 cm (7.50" x 3.87" x 2.43")	16,2 x 6,7 x 5,2 cm (6.37" x 2.62" x 2.06")	1,8 cm (0.69")	3,2 cm (1.25")	-	0,28 kg (0.61 lbs.)	0,27 kg (0.6 lbs.)		0,45 kg (0.99 lbs.)	-23 / 93° C (-10 / 199.4° F)	1032	-	-	-	-	-	· IP67	1030
1040	19,1 x 12,9 x 5,4 cm (7.50" x 5.06" x 2.12")	16,5 x 9,8 x 4,4 cm (6.50" x 3.87" x 1.75")	1,8 cm (0.69")	2,4 cm (0.94")	-	0,33 kg (0.71 lbs.)	0,32 kg (0.7 lbs.)		0,57 kg (1.26 lbs.)	-23 / 93° C (-10 / 199.4° F)	1042	-	-	-	-	-	· IP67	1040
1050	19,1 x 12,8 x 7,9 cm (7.50" x 5.06" x 3.12")	16 x 9,4 x 7 cm (6.31" x 3.68" x 2.75")	1,8 cm (0.69")	4,9 cm (1.94")	-	0,38 kg (0.83 lbs.)	0,37 kg (0.81 lbs.)		0,79 kg (1.74 lbs.)	-23 / 93° C (-10 / 199.4° F)	1052	-	-	-	-	-	· IP67	1050
1060	23,8 x 14,1 x 6,7 cm (9.37" x 5.56" x 2.62")	21 x 10,8 x 5,7 cm (8.25" x 4.25" x 2.25")	1,8 cm (0.69")	3,7 cm (1.44")	-	0,48 kg (1.03 lbs.)	0,46 kg (1 lbs.)		1,13 kg (2.49 lbs.)	-23 / 93° C (-10 / 199.4° F)	1062	-	-	-	-	-	· IP67	1060
1120	20,6 x 16,7 x 9 cm (8.12" x 6.56" x 3.56")	18,4 x 12,1 x 7,8 cm (7.25" x 4.75" x 3.06")	1,3 cm (0.50")	6,5 cm (2.56")	-	0,57 kg (1.23 lbs.)	0,54 kg (1.17 lbs.)		2,27 kg (5 lbs.)	-23 / 99° C (-10 / 210° F)	1121	-	1120PF	-	-	-	· IP67 · Def Stan 81-41/ STANAG 4280	1120
1150	23,2 x 19,2 x 11,1 cm (9.12" x 7.56" x 4.37")	20,8 x 14,4 x 9,2 cm (8.18" x 5.68" x 3.62")	1,9 cm (0.75")	7,3 cm (2.87")	-	0,92 kg (1.98 lbs.)	0,81 kg (1.76 lbs.)		3,63 kg (8 lbs.)	-23 / 99° C (-10 / 210° F)	1151	-	1150PF	-	-	-	· IP67 · Def Stan 81-41/ STANAG 4280	1150
1200	27 x 24,6 x 12,4 cm (10.62" x 9.68" x 4.87")	23,5 x 18,1 x 10,5 cm (9.25" x 7.12" x 4.12")	3 cm (1.18")	7,4 cm (2.93")	-	1,33 kg (2.87 lbs.)	1,23 kg (2.65 lbs.)		5,45 kg (12.02 lbs.)	-23 / 99° C (-10 / 210° F)	1201	-	1200PF	-	-	-	· IP67 · Def Stan 81-41/ STANAG 4280	1200
1300	27 x 24,6 x 17,4 cm (10.62" x 9.68" x 6.87")	25,1 x 17,8 x 15,6 cm (9.87" x 7.00" x 6.12")	3 cm (1.18")	12,5 cm (4.93")	-	1,63 kg (3.53 lbs.)	1,43 kg (3.09 lbs.)		5,6 kg (12.35 lbs.)	-23 / 99° C (-10 / 210° F)	1301	-	1300PF	-	-	1400IP Instapak Quick® RT	· IP67 · Def Stan 81-41/ STANAG 4280	1300
1400	34 x 29,5 x 15,2 cm (13.37" x 11.62" x 6.00")	30 x 22,5 x 13,2 cm (11.81" x 8.87" x 5.18")	3 cm (1.18")	10,2 cm (4.00")	-	2,04 kg (4.41 lbs.)	1,84 kg (3.97 lbs.)		9,1 kg (20.06 lbs.)	-23 / 99° C (-10 / 210° F)	1401	-	1400PF	-	●	1400IP Instapak Quick® RT	· IP67 · MIL C-4150J · Def Stan 81-41/STANAG 4280 · ATA 300	1400
1450	40,7 x 33 x 17,5 cm (16.00" x 13.00" x 6.87")	37,1 x 25,9 x 15,2 cm (14.62" x 10.18" x 6.00")	4,4 cm (1.75")	10,8 cm (4.25")	-	2,96 kg (6.39 lbs.)	2,55 kg (5.51 lbs.)		13,61 kg (30 lbs.)	-23 / 99° C (-10 / 210° F)	1451	1455	1450PF	-	●	1500IP Instapak Quick® RT	· IP67 · MIL C-4150J · Def Stan 81-41/STANAG 4280	1450
1500	47 x 35,7 x 17,6 cm (18.50" x 14.06" x 6.93")	42,6 x 28,4 x 15,6 cm (16.75" x 11.18" x 6.12")	4,6 cm (1.81")	10,9 cm (4.31")	-	3,26 kg (7.05 lbs.)	2,96 kg (6.39 lbs.)		22,68 kg (50 lbs.)	-23 / 99° C (-10 / 210° F)	1501	1505	1500PF	1508	●	1500IP Instapak Quick® RT	· IP67 · MIL C-4150J · Def Stan 81-41/STANAG 4280 · ATA 300	1500
1510	55,9 x 35,1 x 22,9 cm (22.00" x 13.81" x 9.00")	50,2 x 27,9 x 19,4 cm (19.75" x 11.00" x 7.60")	4,5 cm (1.79")	14,7 cm (5.79")	Wheels (2) Extendable Handle	6,17 kg (13.6 lbs.)	5,44 kg (11.99 lbs.)		29,1 kg (64.15 lbs.)	-23 / 99° C (-10 / 210° F)	1511	1515		1519	●	1520IP Instapak Quick® RT	· IP67 · Def Stan 81-41/ STANAG 4280	1510
1520	48,6 x 39,2 x 19,2 cm (19.78" x 15.77" x 7.41")	45,4 x 32,4 x 17,2 cm (18.06" x 12.89" x 6.72")	4,6 cm (1.79")	12,5 cm (4.93")	-	4,33 kg (9.35 lbs.)	3,76 kg (8.29 lbs.)		18,14 kg (40 lbs.)	-23 / 99° C (-10 / 210° F)	1521	1525	1520PF	1509	●	1520IP Instapak Quick® RT	· IP67 · MIL C-4150J · Def Stan 81-41/STANAG 4280	1520
1550	52,4 x 42,9 x 20,6 cm (20.62" x 16.87" x 8.12")	46,8 x 35,6 x 19,4 cm (18.43" x 14.00" x 7.62")	4,4 cm (1.75")	14,9 cm (5.87")	-	5,51 kg (11.9 lbs.)	4,9 kg (10.58 lbs.)		31,7 kg (69.89 lbs.)	-23 / 99° C (-10 / 210° F)	1551	1555	1550PF		●	1550IP Instapak Quick® RT	· IP67 · MIL C-4150J · Def Stan 81-41/STANAG 4280 · ATA 300	1550
1560	56,1 x 45,6 x 26,5 cm (22.06" x 17.93" x 10.43")	51,8 x 39,2 x 22,9 cm (20.37" x 15.43" x 9.00")	5,1 cm (2.00")	17,8 cm (7.00")	Wheels (2) Extendable Handle	9,26 kg (20 lbs.)	7,87 kg (17 lbs.)		47,17 kg (104 lbs.)	-23 / 99° C (-10 / 210° F)	1561	1565		1569	●	1550IP Instapak Quick® RT	· IP67 · Def Stan 81-41/ STANAG 4280	1560
1080	34,9 x 27,8 x 6,5 cm (13.75" x 10.95" x 2.55")	32,5 x 24,9 x 4,3 cm (12.80" x 9.80" x 1.70")	2,2 cm (0.85")	2,2 cm (0.85")	-	1,34 kg (2.89 lbs.)	1,28 kg (2.76 lbs.)		4,54 kg (10 lbs.)	-23 / 93° C (-10 / 200° F)	-	-	-	-	-	-	· IP66	1080
1090	40,2 x 33,3 x 7,3 cm (15.83" x 13.10" x 2.86")	38,1 x 28,7 x 4,9 cm (15.00" x 11.32" x 1.92")	2,4 cm (0.96")	2,4 cm (0.96")	-	1,50 kg (3.32 lbs.)	1,35 kg (2.98 lbs.)		5,22 kg (11.5 lbs.)	-23 / 93° C (-10 / 200° F)	-	-	-	-	-	-	· IP66	1090

All Peli Cases have a 2 degree draft angle with a bottom radius of 0.66 +/- 0.020. Length and width are measured at the base of the case from the top of the radius. Depth is measured at the centre of the case and includes lid depth.
* OD Green available upon request

Case	Exterior	Interior	Lid Depth	Case Depth	Special Features	Weight with Foam	Weight without Foam	Colours	Buoyancy Maximum	Range Temperature Minimum/Maximum	OPTIONAL ACCESSORIES						Certificates	Case
											Foam Set	Padded Dividers	Panel Frame	Lid Organizers	Nameplate	Other		
1430	43 x 24,4 x 34,1 cm (16.93" x 9.61" x 13.42")	34,5 x 14,6 x 29,7 cm (13.56" x 5.76" x 11.70")	5,1 cm (2.00")	24,6 cm (9.70")	-	3,01 kg (6.5 lbs.)	2,59 kg (5.6 lbs.)		26,76 kg (59 lbs.)	-23 / 99° C (-10 / 210° F)	1431	1435 1436 Office	1430PF	1439	●	1438 Boat Bracket Kit 1550IP Instapak Quick® RT	· IP67 · Def Stan 81-41/STANAG 4280	1430
1440	50,1 x 30,5 x 45,7 cm (19.70" x 12.00" x 18.00")	43,5 x 19,1 x 40,7 cm (17.10" x 7.50" x 16.00")	5,1 cm (2.00")	35,5 cm (14.00")	Wheels (2) Extendable Handle	7,64 kg (16.5 lbs.)	6,71 kg (14.5 lbs.)		68,04 kg (150 lbs.)	-23 / 99° C (-10 / 210° F)	1441	1445 Utility w/ Lid Org 1446 Office w/ Lid Org		1449 Office	●	1520IP Instapak Quick® RT	· IP67 · Def Stan 81-41/STANAG 4280	1440
1470	42,4 x 33,2 x 11,1 cm (16.68" x 13.06" x 4.37")	39,7 x 26,5 x 9,5 cm (15.62" x 10.43" x 3.75")	3,5 cm (1.37")	6 cm (2.37")	-	2,55 kg (5.51 lbs.)	1,98 kg (4.28 lbs.)		11,3 kg (24.91 lbs.)	-23 / 99° C (-10 / 210° F)	1471	-	1470PF		●	1472 Shoulder Strap	· IP57 · MIL C-4150J	1470
1490	50,5 x 35,4 x 11,9 cm (19.87" x 13.93" x 4.68")	45,1 x 28,9 x 10,5 cm (17.75" x 11.37" x 4.12")	3,8 cm (1.50")	6,7 cm (2.62")	-	3,01 kg (6.5 lbs.)	2,53 kg (5.47 lbs.)		18,6 kg (41 lbs.)	-10 / 210° F (-23 / 99° C)	1491	-	1490PF	1498	●	1472 Shoulder Strap 1499CBI Comp. Bottom	· IP57 · Def Stan 81-41/STANAG 4280	1490
1495	54,9 x 43,8 x 12,4 cm (21.62" x 17.25" x 4.87")	47,9 x 33,3 x 9,7 cm (18.87" x 13.12" x 3.81")	2,8 cm (1.12")	6,8 cm (2.68")	-	3,88 kg (8.37 lbs.)	3,35 kg (7.23 lbs.)		20,48 kg (45.15 lbs.)	-10 / 210° F (-23 / 99° C)	1495HD	-	-	1495ALI	●	1472 Shoulder Strap	· IP67 · Def Stan 81-41/STANAG 4280	1495
1600	61,6 x 49,4 x 22,1 cm (24.25" x 19.43" x 8.68")	54,4 x 41,9 x 20 cm (21.43" x 16.50" x 7.87")	4,4 cm (1.75")	15,6 cm (6.12")	-	6,53 kg (14.11 lbs.)	6,02 kg (13 lbs.)		34 kg (74.96 lbs.)	-23 / 99° C (-10 / 210° F)	1611	1605	-	1609	●	1600IP Instapak Quick® RT	· IP67 · MIL C-4150J · Def Stan 81-41/STANAG 4280 · ATA 300	1600
1610	62,8 x 49,8 x 30,3 cm (24.71" x 19.58" x 11.93")	55,1 x 42,2 x 26,8 cm (21.68" x 16.62" x 10.56")	5,2 cm (2.06")	21,6 cm (8.50")	Wheels (2) Extendable Handle	10,41 kg (22.49 lbs.)	9,26 kg (20 lbs.)		54,4 kg (119.93 lbs.)	-23 / 99° C (-10 / 210° F)	1611	1615	-	1609	●	1600IP Instapak Quick® RT	· IP67 · Def Stan 81-41/ STANAG 4280	1610
1620	63 x 49,2 x 35,2 cm (24.81" x 19.37" x 13.87")	54,3 x 41,4 x 31,9 cm (21.37" x 16.31" x 12.56")	5,2 cm (2.06")	26,7 cm (10.50")	Wheels (2) Extendable Handle	12,04 kg (26.01 lbs.)	11,33 kg (24.47 lbs.)		68 kg (149.91 lbs.)	-23 / 99° C (-10 / 210° F)	1621	1625	-	1609	●	1600IP Instapak Quick® RT	· IP67 · MIL C-4150J · Def Stan 81-41/STANAG 4280	1620
1630	79,5 x 61,5 x 44,4 cm (31.28" x 24.21" x 17.48")	70,4 x 53,3 x 39,4 cm (27.70" x 20.98" x 15.50")	8,3 cm (3.25")	30,8 cm (12.14")	Wheels (4)	16,67 kg (36 lbs.)	14,35 kg (31 lbs.)		158,76 kg (350 lbs.)	-23 / 99° C (-10 / 210° F)	1631	1635	-	1639	●	-	· IP67 · Def Stan 81-41/STANAG 4280	1630
1640	69,1 x 69,9 x 41,4 cm (27.20" x 27.50" x 16.30")	60,2 x 61 x 35,3 cm (23.70" x 24.00" x 13.90")	5,1 cm (2.00")	30,2 cm (11.90")	Wheels (4) Extendable Handle	17,59 kg (38 lbs.)	15,74 kg (34 lbs.)		165,56 kg (365 lbs.)	-23 / 99° C (-10 / 210° F)	1641	1645	-	0379	●	-	· IP67 · Def Stan 81-41/STANAG 4280	1640
1650	78,1 x 52,1 x 29,5 cm (30.75" x 20.50" x 11.62")	72,4 x 44,1 x 26,7 cm (28.50" x 17.37" x 10.50")	4,7 cm (1.87")	21,9 cm (8.62")	Wheels (4) Extendable Handle	16,43 kg (35.49 lbs.)	13,47 kg (29.1 lbs.)		82,1 kg (181 lbs.)	-23 / 99° C (-10 / 210° F)	1651	1655	-	1659	●	-	· IP67 · MIL C-4150J · Def Stan 81-41/STANAG 4280 · ATA 300	1650
1660	80 x 58,1 x 48,3 cm (31.50" x 22.87" x 19.00")	71,6 x 50,2 x 44,8 cm (28.18" x 19.75" x 17.62")	8,9 cm (3.50")	35,9 cm (14.12")	Wheels (4) Extendable Handle	19,5 kg (42.11 lbs.)	15,82 kg (34.17 lbs.)		158,8 kg (350.1 lbs.)	-23 / 99° C (-10 / 210° F)	1661	1665	-	1669	●	-	· IP67 · Def Stan 81-41/STANAG 4280	1660
1690	84,8 x 72,3 x 46,3 cm (33.36" x 28.44" x 18.23")	76,3 x 63,6 x 40,7 cm (30.01" x 25.02" x 16.01")	7,3 cm (2.86")	30,8 cm (12.14")	Wheels (4) Extendable Handle	19,91 kg (43 lbs.)	15,74 kg (34 lbs.)		185,97 kg (410 lbs.)	-23 / 99° C (-10 / 210° F)	1691	-	-	1699	●	-	· IP67 · Def Stan 81-41/STANAG 4280	1690
0340	52,1 x 52,1 x 48,9 cm (20.50" x 20.50" x 19.25")	45,7 x 45,7 x 45,7 cm (18.00" x 18.00" x 18.00")	10,2 cm (4.00")	31,8 cm (12.50")	Wheels (4) Extendable Handle	13,78 kg (29.76 lbs.)	11,11 kg (24 lbs.)		100 kg (220.46 lbs.)	-23 / 99° C (-10 / 210° F)	0341	0345	-	0349	●	-	· IP67 · Def Stan 81-41/STANAG 4280	0340
0350	57,2 x 57 x 54 cm (22.50" x 22.43" x 21.25")	50,8 x 50,8 x 50,8 cm (20.00" x 20.00" x 20.00")	12,7 cm (5.00")	38,1 cm (15.00")	Wheels (4) Optional	14,82 kg (32.01 lbs.)	12,03 kg (25.99 lbs)		122 kg (268.96 lbs.)	-23 / 99° C (-10 / 210° F)	0351	0355	-	0359	●	0357 Mobility Kit	· IP67 · Def Stan 81-41/STANAG 4280	0350
0370	67,3 x 67,3 x 64,2 cm (26.50" x 26.50" x 25.25")	61 x 61 x 61 cm (24.00" x 24.00" x 24.00")	11,4 cm (4.50")	45,7 cm (18.00")	Wheels (4) Optional	18,98 kg (41 lbs.)	14,8 kg (31.97 lbs.)		211 kg (465.18 lbs.)	-23 / 99° C (-10 / 210° F)	0371	0375	-	0379	●	0357 Mobility Kit	· IP67 · Def Stan 81-41/STANAG 4280	0370
1700	96,9 x 40,6 x 15,5 cm (38.12" x 16.00" x 6.12")	90,8 x 34,3 x 13,3 cm (35.75" x 13.50" x 5.25")	4,4 cm (1.75")	8,9 cm (3.50")	Wheels (2)	7,86 kg (16.98 lbs.)	7,45 kg (16.09 lbs.)		62,1 kg (136.91 lbs.)	-23 / 99° C (-10 / 210° F)	1701	-	-	-	-	-	· IP67 · MIL C-4150J · Def Stan 81-41/STANAG 4280	1700
1720	112,7 x 40,6 x 15,5 cm (44.37" x 16.00" x 6.12")	106,7 x 34,3 x 13,3 cm (42.00" x 13.50" x 5.25")	4,4 cm (1.75")	8,9 cm (3.50")	Wheels (2)	8,84 kg (18.96 lbs.)	7,92 kg (16.76 lbs.)		73 kg (160.94 lbs.)	-23 / 99° C (-10 / 210° F)	1721	-	-	-	●	-	· Def Stan 81-41/STANAG 4280	1720
1730	95,2 x 68,9 x 36,5 cm (37.50" x 27.13" x 14.37")	86,3 x 60,9 x 31,7 cm (34.00" x 24.00" x 12.50")	6,3 cm (2.50")	25,4 cm (10.00")	Manual Pressure Valve	16,78 kg (37 lbs.)	13,15 kg (29 lbs.)		188,69 kg (416 lbs.)	-23 / 99° C (-10 / 210° F)	1731	-	-	-	●	-	Pending	1730
1750	134,7 x 40,7 x 15,6 cm (53.00" x 16.00" x 6.12")	128,3 x 34,3 x 13,3 cm (50.50" x 13.50" x 5.25")	4,4 cm (1.75")	8,9 cm (3.50")	Wheels (2)	11,84 kg (25.57 lbs.)	10,92 kg (23.59 lbs.)		85 kg (187.39 lbs.)	-23 / 99° C (-10 / 210° F)	1751	-	-	-	●	-	· IP67 · Def Stan 81-41/STANAG 4280	1750
1780	114,1 x 64,3 x 41,9 cm (44.90" x 25.32" x 16.50")	106,7 x 55,9 x 38,4 cm (42.00" x 22.00" x 15.10")	19,3 cm (7.58")	18,5 cm (7.30")	Wheels (4)	22,69 kg (49 lbs.)	17,78 kg (38.4 lbs.)		226,8 kg (500 lbs.)	-23 / 99° C (-10 / 210° F)	-	-	-	-	●	-	· Def Stan 81-41/STANAG 4280	1780

All Peli Cases have a 2 degree draft angle with a bottom radius of 0.66 +/- 0.020. Length and width are measured at the base of the case from the top of the radius. Depth is measured at the centre of the case and includes lid depth.
* OD Green available upon request

ULTIMATE EQUIPMENT PROTECTION

For more than 30 years Peli has built a reputation for manufacturing the toughest Protector™ Cases in the world. As a matter of fact, we invented the category. Over these years we've seen our cases used for some pretty crazy ideas... and important ones, too.

The Peli Protector™ Case has been thrown out of helicopters in Iraq, towed along frigid fjords in Norway, and rolled over by SUVs in Tanzania. With only a few scratches to show on the outside, contents are left unscathed. Minor war wounds for major bragging rights. And that is really what it's all about. Getting your gear from point A to point B in the condition it's meant to be in: intact and functional. Because it could contain that large format camera that will shoot next month's magazine cover, or a heart defibrillator that could produce results you can't put a price on.



COLOUR CHOICES

To quickly spot your case in rushing water or to blend with the environment, Peli's case colour palette gives you the option. Call for Desert Tan and OD Green availability.



STRONGER BY DESIGN

Peli Protector Cases™ are made with Copolymer Polypropylene, using an open cell core and solid wall construction, which is actually stronger and lighter than the solid core wall. Peli's moulded structure and multiple heavy duty 'fins' offer extra protection so that the impact of a shock is evenly dispersed, keeping the internal equipment safe. Stainless Steel pins are used for hinges and handles. Their Double-Step latches are smarter and easier to open: the patented design works like a pry bar to start the release and offers plenty of leverage to open with a light pull. You will know it's a Peli™ Case by its distinctive dual-band top surface and pressure valve. Travel light with heavy protection.



WATERTIGHT

The secret is the tongue-and-groove fit, with a polymer o-ring acting as a waterproof seal. Also, the Automatic Pressure Equalization Valve releases built-up air pressure while keeping water molecules out, resulting in a watertight case that is even easier to open after pressure changes.

EXTRA PROTECTION

Peli's Pick 'N' Pluck™ foam lets you customise the interior according to your gear. An easy, do-it-yourself system for custom-shaping the interior of the case according to your equipment. Layers of foam are pre-scored in tiny cubes. Simply measure your equipment over the grid and pluck away. Contents stay in place and get extra protection at the same time. For organising supplies, check out our optional padded dividers. Individual compartments are adjustable using Velcro®. See pages 38-39 for details.

EASY ROLLER

Stainless steel ball bearing wheels (on selected cases) last longer and ride smoother. The nylon hub adjacent to the stainless steel is made to resist heat. Result: less wear and tear on the polyurethane wheel.



STAINLESS STEEL
BALL BEARING WHEELS
NYLON HUB
POLYURETHANE TIRE



REINFORCED PADLOCK PROTECTORS

Stainless steel reinforced padlock protectors provide added strength and extra security against cutting and theft.


PICK ‘N’ PLUCK™ FOAM SETS

The foam in Peli’s Protector™ Cases consists of a layer of convoluted foam for the lid, a 2,54 cm (1 inch) layer to pad the bottom, and one to four layers of Pick ‘N’ Pluck™ in between. These centre sections are also available separately. Here is a breakdown of what you can expect to find in each of our cases:




3-PIECE SET

- 1080 ▪ 1450 ▪ 1500
- 1120 ▪ 1470 ▪ 1700
- 1150 ▪ 1490 ▪ 1720
- 1200 ▪ 1495 ▪ 1750
- 1400 ▪ 1520




4-PIECE SET

- 1300 ▪ 1550 ▪ 1600
- 1510 ▪ 1560 ▪ 1650




5-PIECE SET

- 1430 ▪ 1630 ▪ 1660
- 1610 ▪ 1640 ▪ 1690



6-PIECE SET

- 1440 ▪ 1620 ▪ 1780



7-PIECE SET

- 0340 ▪ 0350 ▪ 0370

INSTAPAK QUICK® RT





Instapak Quick® RT 2 part chemical foam expands quickly around your equipment for snug protection. See the technical bulletins at www.peli.com/support for more details.

Here’s how Pick ‘N’ Pluck™ works:



STEP 1: Lay item on foam block and outline with chalk.



STEP 2: Separate 1,3 cm cubes from block, following outline.



STEP 3: Place the 2,5 cm foam layer (provided) in bottom of case and finished Pick ‘N’ Pluck™ foam on top.

Padded Divider Options			
Case	Layers	With Case	Divider Set Only
1450	1	1454	1455
1500	1	1504	1505
1510	1	1514	1515
1520	1	1524	1525
1550	1	1554	1555
1560	1	1564	1565
1600	2	1604	1605
1610	1	1614	1615
1620	1	1624	1625
1630	2	1634	1635
1640	2	1644	1645
1650	1	1654	1655
1660	2	1664	1665
1690	2	1694	1695
0340	2	0344	0345
0350	2	0354	0355
0370	2	0374	0375

PADDED DIVIDERS

Main dividers that span the length of the case are complimented by varying sizes of subdividers. Velcro® edges make it easy to reposition these dividers into the spaces you need.



Cat. No. 1444

Cat. No. 1447

1430 Case Options	Accessories only
Photo Divider Set 2 divider layers with photo lid organiser	1435
Office Divider Set Office interior, mesh lid organiser, and strap	1436
Boat Bracket Kit	1438
1440 Case Options	Accessories only
Utility Utility padded divider set and lid organiser	1445
Office Office padded divider set and lid organiser	1446

Case	Lid Organiser Options
1430	1439 Photo
1440	1449 Mesh
1490	1498 Leather
1495	1495ALI Leather
1500	1509 Mesh · 1508Photo 1505 EMS
1510	1519 Mesh
1520	1509 Mesh · 1508 Photo
1550	1555 EMS
1560	1569 Mesh · 1555 EMS
1600	1609 Mesh · 1605 EMS
1610	1609 Mesh
1620	1609 Mesh
1630	1639 Mesh
1640	0379 Mesh
1650	1659 Mesh
1660	1669 Mesh
1690	1699 Mesh
0340	0349 Mesh
0350	0359 Mesh
0370	0379 Mesh

LID ORGANISERS

Made of leather or waterproof Ballistic Nylon with nylon zippers. Multitude of pockets in various sizes protect and keep your gear organised. Installs with Velcro® strips (included) or self tapping screws.



Mesh



Attaché



Photo



Computer



EMS



Cat. No. 1490CC1

Cat. No. 1495CC2

1490 Case Options	With Case	Accessories only
Pick ‘N’ Pluck™ Foam With lid organiser. Fits computers up to 44,1 x 27,9 x 8,5 cm	1490CC2	1491
Computer Bottom Moulded Foam Insert With lid organiser. Fits computers up to 35,5 x 27,6 x 6,3 cm	1490CC1	1499C
1495 Case Options	With Case	Accessories only
Computer Case Deluxe With lid organiser, fitted shock absorbing laptop sleeve, and removable shoulder strap. Fits up to 17" laptops.	1495CC1	n/a
Computer Case With Pick ‘N’ Pluck™ foam, lid organiser, and removable shoulder strap. Fits up to 17" laptops.	1495CC2	n/a



PROTECTION SYSTEMS AND ELECTRONIC INSTALLATIONS

FOR ANSWERS TO ALL YOUR OEM QUESTIONS, GO TO WWW.PELIOEM.COM.

The indestructible Peli Protector™ Case is your solution for OEM enclosures and custom electronic component protection. With an open cell core and solid copolymer polypropylene wall construction, you travel light with heavy duty protection against extreme temperatures, moisture, and chemicals.

Installing computer interfaces is simple, thanks to the moulded-in stops inside the case walls that support our Panel Frame Mounting System.



Wall mounted Peli 1600 case with telecommunications gear.



Peli 1520 case with custom panel frame inserts

FOAM IS OUR FRIEND

We can suggest a wide range of materials to fit your needs.

A: For the perfectionists who want the exact custom fit, send us a sample of your product or CAD files and we can suggest several layouts and foam choices.


B: For extremely sensitive equipment like microchips, circuit boards, and medical equipment, we recommend foam with antistatic and antibacterial properties.

C: Need to keep track of your tools? Colour contrast design tells you in a quick glance if all items are accounted for.

D: Crosslinked foam is chemical and water resistant. The closed cell construction with fused walls has memory, keeping its shape through repeated usage and safeguarding multiple weights of goods.

For standard in-stock padding systems, see page 38.

For custom foam information, go to PeliOEM.com

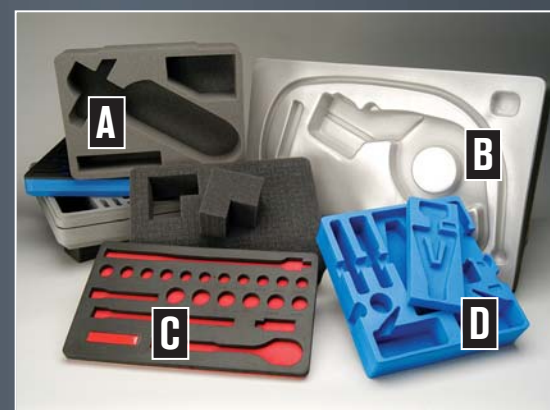

PANEL FRAME INSERTS

Peli offers an easy solution for installing interface panels to any Peli Protector™ Case. We provide the mounting bracket which installs beneath your panel and fits against stops moulded inside the case walls. A neoprene o-ring seals the panel so the case remains watertight, even with the lid open. With pre-drilled holes and stainless steel screws, fabricating a custom case is faster, stronger, and more accurate.

For information, go to PeliOEM.com



HOT STAMPING SERVICES

Your company logo can be applied in multiple colours as a decal or hot stamp, using strict PMS print controls on any Peli™ Case. You'll approve a paper proof or first article prior to the run and, like everything we manufacture, our imprinting is 100% guaranteed. For further information please contact us.



PERSONALISED NAME PLATE



Fill out and send in the Nameplate Services envelope included inside your Peli™ Case and have your name engraved on a black nameplate (for a nominal fee). Also available at Peli.com.

1520D DESSICANT GEL



Drinks dampness and prevents condensation from trapped air when cases are opened in high humidity climates. Stops mildew before it starts. Reusable by oven drying yearly. Fits all Peli cases. 5 x 10,2 cm.

0357 MOBILITY KIT



- Optional for 0350 and 0370 Cases
- Four removable casters with mounting plates
- Pull strap and nylon carry bag included

1506 PELILOCK



4-digit code combination brass lock. Fits all Peli cases.

1506TSA TSA LOCK



4-digit code combination TSA approved lock. Also works with TSA PassKey for worry-free travel. Fits all Peli cases.

CERTIFICATIONS

Peli™ Cases have been tested by several government and private organisations and they have passed the most strict quality tests. They needed to make sure that the cases complied with their requirements with respect to protection against knocks, immersion, humidity, corrosion, stacking and drop resistance. Now most of Peli™ Cases are NATO codified and handle several certificates:

STANAG 4280 - DEF STAN 81-41

MIL C-4150-J

ATA (Air Transportation Association) - Specification 300

NATO Stock Number (NSN)

Ingress Protection (IP) codes - EN 60529:1992


Ingress protection (IP) codes EN 60 529: 1992 Peli™ Cases have IP57, IP66 and IP67 Certificates			Protection against the penetration of liquids									
			0	1	2	3	4	5	6	7	8	
			No Protection	Protected against vertically falling drops	Protected against vertically falling drops with enclosure of 15°	Protected against spraying water	Protected against splashing	Protected against water jets	Protected against powerful water jets	Protected against the effects of temporary immersion in water	Protected against the effects of continuous immersion in water	
												
Protection against solid bodies	0	No Protection		IP00								
	1	Protected against objects greater than 50 mm		IP10	IP11	IP12	IP13	IP14	IP15	IP16	IP17	IP18
	2	Protected against objects greater than 12 mm		IP20	IP21	IP22	IP23	IP24	IP25	IP26	IP27	IP28
	3	Protected against objects greater than 2,5 mm		IP30	IP31	IP32	IP33	IP34	IP35	IP36	IP37	IP38
	4	Protected against objects greater than 1,0 mm		IP40	IP41	IP42	IP43	IP44	IP45	IP46	IP47	IP48
	5	Dust protected		IP50	IP51	IP52	IP53	IP54	IP55	IP56	IP57	IP58
	6	Dust tight		IP60	IP61	IP62	IP63	IP64	IP65	IP66	IP67	IP68

For further information, please contact Peli Products S.A.



MEET THE OTHER HALF OF PELI

INDUSTRIAL

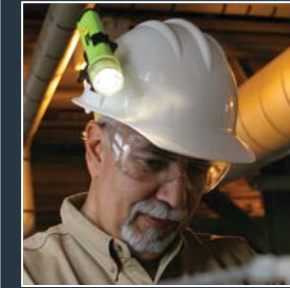

You need the right tools to get the job done. Peli manufactures some of the most safety approved lights on the market and has raised the bar for all LED lights with their cutting edge Recoil LED Technology®. With more than 50 different lights to choose from, there are almost as many lighting tools as there are jobs in the industrial marketplace.



LAW ENFORCEMENT



Peli's full line of M-Series tactical lights, duty lights and accessories (such as gun mount kits) offer law enforcement professionals a full solution for their illumination needs. The M-Series lights use cutting edge LED technology to shine brilliant light on a suspect, a victim or a duty log. Our tactical lights are rough, ready and among the brightest and lightest on the market.



DIVE



Peli's Nemo™ series lights are legendary in the dive and marine industry. They're watertight up to 150 metres, extremely bright, and highly efficient with extended burn times. Perfect for duties on deck and exploring the deep abyss.




FIRE



Peli's tough, legendary lights such as the Big Ed™, Little Ed™ and Recoil LED™ work overtime alongside firefighters to get the job done. Our line of Recoil LED™ lights, with an extreme battery run time, brilliant collimated beam and rugged construction, ensure that firefighters won't have to fend for themselves in a tight spot.




OUTDOOR

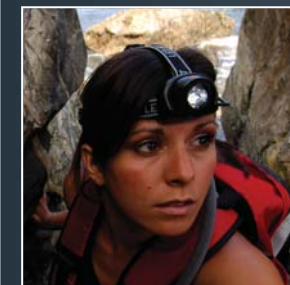

Let Peli light your way to adventure. Our full line of headlamps is cutting edge technology adapted for the rigours of the wilderness or caves 60 metres underground. Our Recoil LEDs™ can lead the expedition with their extreme battery economy, brilliant collimated beams and tough polymer construction. Also, our full line of hands-free, clip-on lights focus the attention on what you need to see so that you can focus on what you need to do.



MILITARY

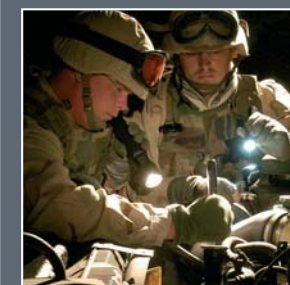

Peli manufactures a full line of tactical LED and hands-free lights that shed light on the toughest missions. Additional accessories such as gun mounts, finger light mounting kits and night-vision light filters add another level of utility to Peli's cutting edge lighting tools.



What does it mean to be a Peli?

It means you care. It means you look forward to your workday. It's quite an experience - knowing that you are a necessary part of a growing successful organisation. Where the plastic arrives in tanker loads of pellets and leaves as the best lights and cases the world has ever seen. And it means choosing such a company to be an important part of your career.

People you want to talk to.

Our highly trained Customer Service Department will go to any length to get you information. From product specs and tracking orders to opening new accounts, ask us a question, we guarantee an answer.

You break it, we replace it... forever™.

Our guarantee can't be stated more clearly than that. And we've been saying this for more than 30 years. If something isn't right with your case or torch, our Guarantee is on top of it. If it's beyond repair, you get a brand new one, just like that. Every product that leaves our hands is unconditionally guaranteed. Simple.

Peli means quality and ISO proves it.

You want a case or torch you can count on. Our job is to make it happen, and ISO Certification allows us to keep making it happen. All of our operators are quality conscious, striving for continued improvement and trained to scrap anything that is not 100% perfect. Using Six Sigma Methodology our world class Quality Assurance team is constantly looking for and eliminating any flaws in the process. The result: every case, every torch is tested before it ships and is backed by our legendary Unconditional Guarantee of Excellence.



The Bottom Line.

When you need a torch or case, you want the best. You need a Peli product. Everything you see in this catalogue is brought to you by Pelis, who not only build the best but also stand behind it.

The Peli Story

Peli Products came into existence as a direct result of founder Dave Parker's desire to develop unique and practical products for the dive market. An avid diver since age 11 (after reading a June, 1954 issue of Popular Science magazine, which outlined how to build a crude S.C.U.B.A. device using a garden hose, a paint compressor, a power lawn mower engine and an enema bag), Dave has dived some of the most exotic spots in the world.

Through his experience he discovered that certain things he needed to make a dive complete were simply not available. It dawned on him that "if I need something like this, I'll bet all the other divers do, too!" It was from his old dirt floor garage that Peli Products was born, in the great American tradition on a shoe string budget. The Peli Float was its first product and patent.

After a day's work at his advertising and industrial design business, Dave and his wife and co-founder, Arline, a flight attendant for TWA, would spend evenings in their garage building floats. Dave handled the assembly side of the business. Arline boxed, billed and mailed everything out between her regularly scheduled flights. Dave's homemade float was sold through mail order ads placed in magazines. It was soon apparent that Peli Products was not going to stay a garage operation for very long.

From the birth of the Float, Peli has developed into a multiproduct, multi-industry company with a complete line of submersible and waterproof safety approved torches and equipment Protector™ cases. From a garage part time mail order operation, Peli has become a thriving ISO 9001:2000 certified, self-contained, fully operational moulding, manufacturing and design corporation with over 500 employees worldwide. In addition to the Torrance main office and manufacturing facility, we have offices in Spain, France, Germany, Australia, Japan, China and Canada and starting this year, Peli has manufacturing facilities in Germany.

It is true that Peli and its product lines have grown a great deal over the past several years. Many things will continue to grow and change except this: Peli's Commitment to Excellence and of course, our Legendary "You break it, we replace it forever™" Guarantee.



Dave Parker, pictured with his on site *Famous Peli Rare Car Collection*, today is the Vice Chairman of Peli Products.

